

PK75-4-318 Coax Cable

75 Ohm CATV coaxial Cable

NO.7100381



Construction Parameters:

Inner Conductor	0.04"/1.02mm/18 AWG BC
Dielectric	0.18"/4.60mm FPE
Shield 1	Cu/PET
Shield 2	CuSn braid wire 63% coverage
Jacket	6.80±0.20mm PVC
Jacket Thickness	0.032"/0.81mm
Application	For Use in Longer CATV Run Lengths

Electrical Characteristics:

Inner Conductor Resistance	The Max. at 20°C shall be < 17.5Ω/km
Capacitance	54 ±3 pF/m
Impedance	75 ± 3 Ω
Return loss	between 5 and 1000MHz: > 22dB
Velocity of Propagation	0.82
Sparker Test (VAC)	4




Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	6.8±0.20mm PVC

Cross Section

PK75-4-318 Coax Cable

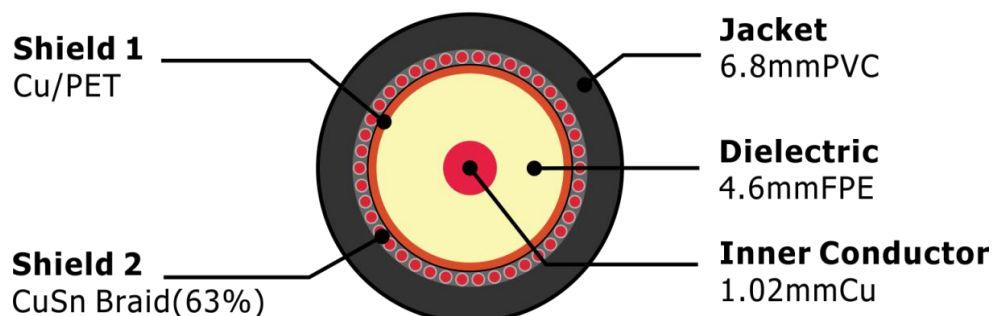

Attenuation(20℃):

Frequency (MHZ)	Max Attenuation(dB/100m)
10	1.90
50	4.20
220	8.60
470	13.40
862	18.40
1000	20.00
1350	23.60
1750	27.20
2150	30.50
2400	32.90
3000	36.10

Order Informations:

Marking	HELLOSIGNAL PK75-4-318 Coax Cable CATV COAXIAL CABLE 7100381 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD