

12AWG 2/C SOL Shielded FPLR-CL2R

Fire Alarm Cables

NO.7110130



Cable construction :

Conductor:

12 AWG Solid Bare Copper
Nom.Dia:0.081"(2.05mm)

Dielectric:

Type: Polypropylene
Dia.over Dielectric: 0.1±0.004"nom.(2.54mm±0.10mm)
Drain Wire: 1.29mm Solid Tinned-Copper
Shield :0.001"(0.025mm) thick Aluminum/Mylar

Color Code:

1.Blk 2.Red

Jacket:

Type: PVC
Color: Red
Dia.over Jacket: 0.218"±0.006"(5.54±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110130 12AWG 2C 75C E***** (UL) Shielded FPLR-CL2R
SUN RES(ROHS) ****M/FT DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 9




Electrical Properties :

Temperature Rating	-20°C ~ +75°C
Operating Voltage	300 Volts max
Capacitance	44 pf/ft nom.
Impedance	38 Ohms nom.
DC Resistance	1.65 Ohms/M' at 20oC

Cross Section :

12AWG 2/C SOL Shielded FPLR-CL2R

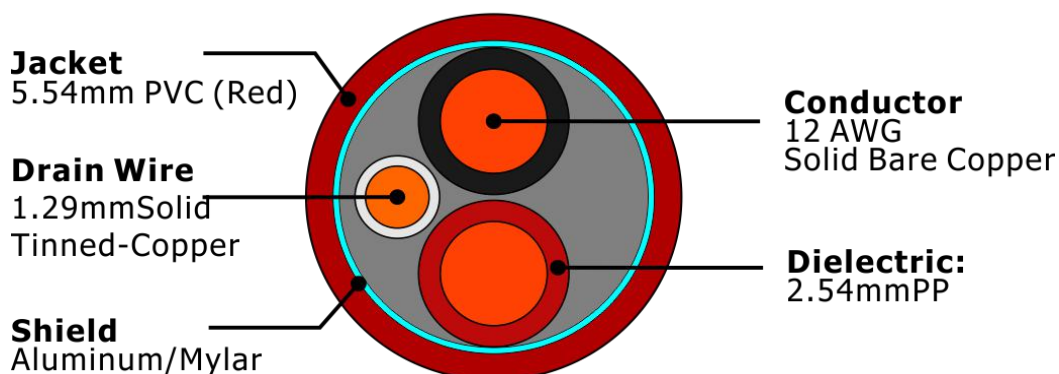

Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD