

KBK-П-1,5+2x0.75,Common

75 Ohm CCTV coaxial Cable

NO.7102211



Construction Parameters:

Inner Conductor	0.25mmCu
Dielectric	1.6mm Solid Polyethylene
Shield	64×0.12mmCCA(90%)
Jacket	3.1mm PVC
Power Wire Conductor	2x(16x0.25mmCCA)
Power wire Diameter of insulator	2.0mm PVC (Red,Black)
Jacket	6.4mm PE Common
Application	For Use in Longer CCTV Run Lengths



Electrical Characteristics:

Inner Conductor	
Resistance	
Capacitance	
Impedance	
Return loss	
Velocity of Propagation	
Sparker Test (VAC)	


HELLO ORIGINAL™
www.zion-communication.com

Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	

Cross Section

KBK-П-1,5+2x0.75,Common

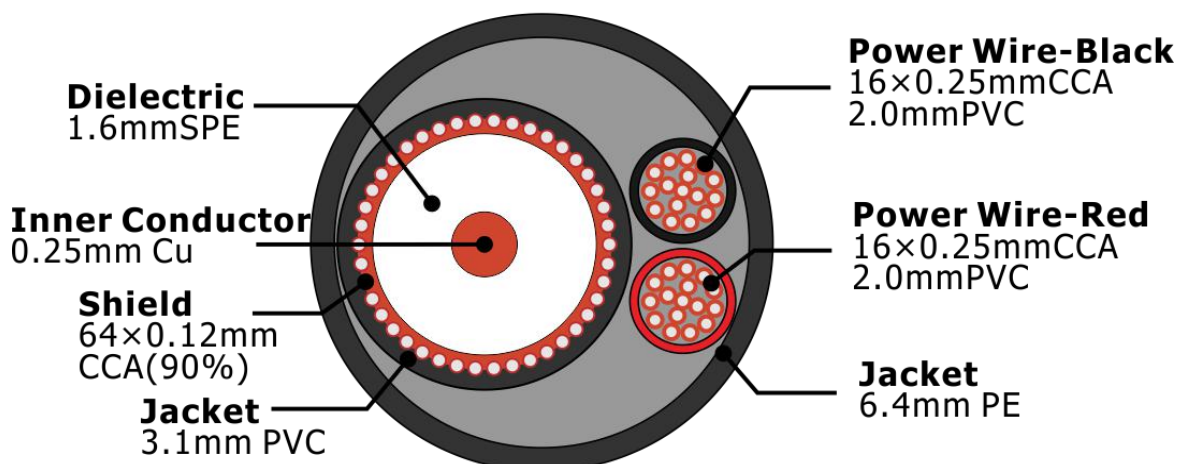

Attenuation(20°C):

Frequency (MHZ)

Max Attenuation(dB/100ft)

Max Attenuation (dB/100m)

Order Informations:

Marking	HELLOSIGNAL KBK-П-1,5+2x0.75,Common CCTV COAXIAL CABLE 7102211 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD