

# PK75-3-32

## 75 Ohm CCTV coaxial Cable NO.7100365



### Construction Parameters:

Inner Conductor	0.024"/0.60mm/22 AWG CU
Dielectric	0.144"/2.70mm FPE
Shield	96/ 0.12mm CCAM
Jacket	4.4mmPVC
Jacket Thickness	0.032"/0.81mm
Application	For Use in Longer CCTV Run Lengths

### Electrical Characteristics:

Inner Conductor Resistance	The Max. at 20°C shall be < 63Ω/km
Capacitance	56.5±1 pF/m
Impedance	75±5 Ω
Return loss	between 5 and 1000MHz: > 20dB
Velocity of Propagation	0.82
Sparker Test (VAC)	




### Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	0.130"±0.006"/3.30±0.30mm PVC

### Cross Section

## PK75-3-32

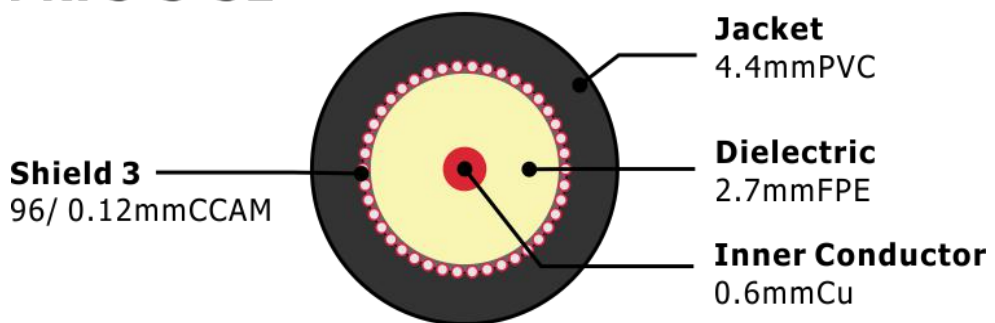

---

## Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100m)
10	3.54
50	8.04
200	16.50
470	25.80
862	35.80
1000	39.00
1350	46.10
1750	53.50
2150	60.00
2400	64.50

---

## Order Informations:

Marking	HELLOSIGNAL PK75-3-32 CCTV COAXIAL CABLE 7100365 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



**www.zion-communication.com**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**