

16AWG 2/C STR Unshielded FPL-CL2

Fire Alarm Cables
NO.7110211



Cable construction :

Conductor:

16AWG Stranded Bare Copper
16 AWG : 7/24, 65/34, 26/30, 19/29, 105/36
Nom.Dia:0.051"(1.29mm)

Dielectric:

Type: PVC
Dia.over Dielectric: 0.0696±0.004"nom.(1.77±0.10mm)

Color Code:

1.Blk 2.Red

Jacket:

Type: PVC
Color: Red
Dia.over Jacket: 0.174"±0.006"(4.41±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110211 16AWG 2C 60C Exxxxxx(UL) STR Unshielded FPL-CL2
SUN RES(ROHS) xxxM/FT DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 9




HELLOSIGNAL™
www.zion-communication.com

Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	20 pf/ft nom
Impedance	81 Ohms nom
DC Resistance	4.15 Ohms/M' at 20°C

Cross Section :

16AWG 2/C STR Unshielded FPL-CL2

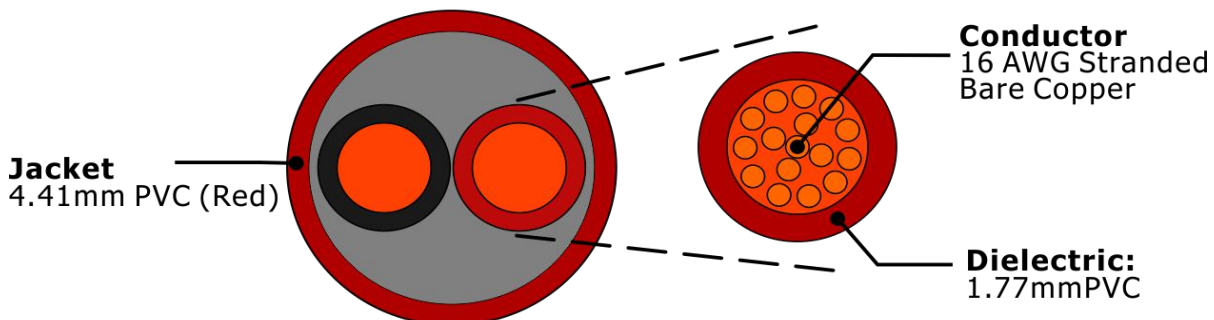

Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD