

# 22AWG 4/C SOL FPL-CL2

## Fire Alarm Cables

NO.7110001



### Cable construction :

**Conductor:**

22 AWG Solid Bare Copper  
Nom.Dia:0.025"(0.64mm)

**Dielectric:**

Type: Polypropylene  
Dia.over Dielectric: 0.036±0.004"nom.(0.91±0.10mm)

**Color Code:**

1.Blk      2.Red      3.Ylw      4.Grn

**Jacket:**

Type: PVC  
Color: Red  
Dia.over Jacket: 0.122"±0.006"(3.10±0.15mm)

**Print Legend:**

HELLOSIGNAL NO.7110001 22AWG 4C 60C Exxxxxx(UL) FPL-CL2  
SUN RES(ROHS) xxxxM/FT DEVICE/ZONE  
A B C D E F 1 2 3 4 5 6 7 8 9




HELLOSIGNAL™  
www.zion-communication.com

### Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	31 pf/ft nom
Impedance	48 Ohms nom
DC Resistance	17.0 Ohms/M' at 20°C

### Cross Section :

## 22AWG 4/C SOL FPL-CL2

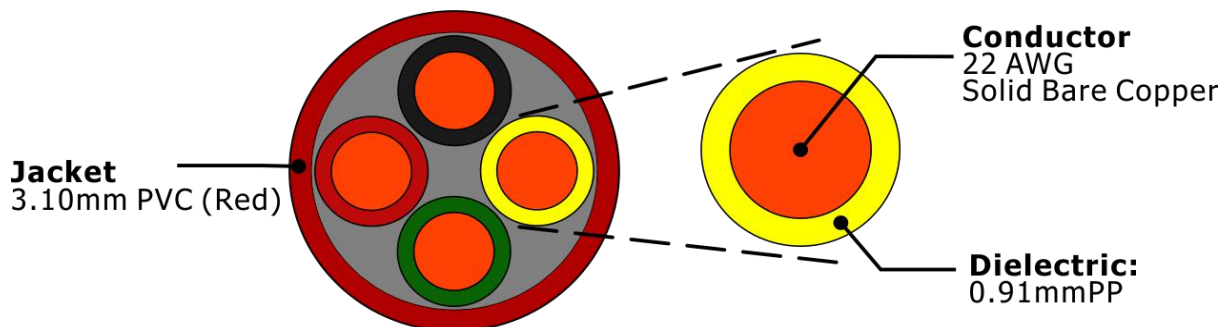

---

## Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com

---



**[www.zion-communication.com](http://www.zion-communication.com)**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**